

EMG 322


MULTIPURPOSE LATEX GRIP GLOVE WITH A LIGHTWEIGHT POLYESTER LINER

The seamless lightweight liner and latex coating maintain an overall superthin feel for enhanced dexterity, fit and comfort. For manual handling in damp and dry conditions.

KEY FEATURES

- Lightweight crinkle latex coating on palm offers improved dexterity, comfort and excellent grip properties in dry and wet conditions
- Seamless 13 gauge polyester knitted liner for a nice wearing experience
- Anatomically designed for high levels of comfort and tactile touch
- Abrasion and rip resistant
- Elasticated wrist provides a secure and comfortable fit
- Seamless liner prevents irritation
- Breathable back of hand to reduce perspiration

CERTIFICATION

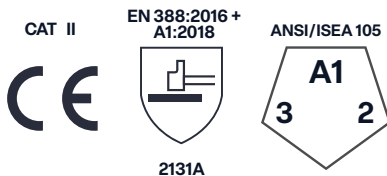

See overleaf for explanation



SUITABLE INDUSTRIES & APPLICATIONS

Typical Industries

Construction	Municipal Services
Engineering	Transport
Logistics	

Suitable Applications

Assembly	Light Engineering
Final Fix	Precision Operations

EMG 322

PRODUCT INFORMATION

MATERIALS	LINER:	13 gauge polyester
	COATING:	Crinkle Latex
COLOUR	Red/Black	
LENGTH (mm)	250 (size dependent)	
CUFF STYLE	Elasticated knit wrist	

ORDERING INFORMATION

SIZE	CODE	PACKAGING
6/XS	EMG00322HB	10 pairs per bag (30% LDPE bag) 120 pairs per case
7/S	EMG00322HD	
8/M	EMG00322HF	
9/L	EMG00322HH	
10/XL	EMG00322HJ	
11/XXL	EMG00322HL	
12/XXXL	EMG00322HN	

RECOMMENDATIONS FOR USE

USE: General handling glove. Not suitable for heat, thermal, electrical, chemical protection. Do not use near moving machines if there is a risk of entanglement.


STORAGE: Store in dry conditions in the original packaging and away from direct sunlight.

CLEANING: To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present.

LIFETIME: Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use.

WARNING: Latex may cause allergies.

CERTIFICATION LEGENDS

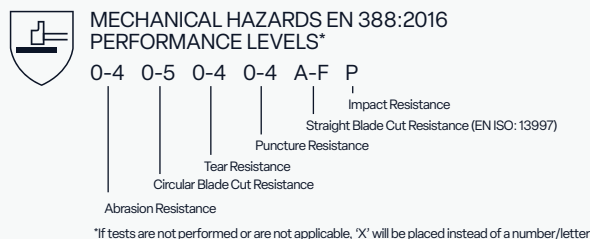

*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter

CLASSIFICATION FOR CUT RESISTANCE

Measured breakthrough time	Permeation performance index (grams)
A1	≥ 200
A2	≥ 500
A3	≥ 1000
A4	≥ 1500
A5	≥ 2200
A6	≥ 3000
A7	≥ 4000
A8	≥ 5000
A9	> 6000

ANSI/ISEA 105-2016 ABRASION RATING CHART

Abrasion Level Rating	0	1	2	3	4	5	6
Gram Load	500	500	500	500	1000	1000	1000
Abrasion Cycles to Fail	<100	≥100	≥500	≥1,000	≥3,000	≥10,000	≥20,000

ANSI/ISEA PUNCTURE RESISTANCE

ANSI Puncture Level	Puncture Resistance (newtons)
1	10-19
2	20-59
3	60-99
4	100-149
5	150+

Puncture Resistance (ANSI/ISEA 105): Puncture resistance is determined by the max force that it takes, exerted from a probe, to puncture the fabric.