




SKYTEC® | TRC715

A LIGHTWEIGHT NITRILE FOAM COATED GLOVE WITH STEEL FIBRE

Outstanding cut resistance allowing protection in the most risky applications. Breathable, long lasting and flexible glove providing excellent grip in oily conditions

FEATURES

- › Cut resistant: Level E (EN 388:2016)
- › A flexible and comfortable glove offering great dexterity
- › HPPE on the inside provides comfort and protection
- › Fully encapsulated steel and nylon on the outside strengthens the protection against burrs and sharp edges
- › Micro foam nitrile coating gives exceptional grip while allowing warm air and moisture from inside to escape, keeping your hands dry and comfortable
- › Reinforced thumb crotch enhances durability
- › Designed for easy movement and continuous wear
- › Breathable back of hand to reduce perspiration
- › Seamless knit prevents irritation
- › Elasticated wrist provides a secure fit



SUITABLE FOR

Typical Industries

- Automotive
- Construction
- Maintenance
- Manufacturing
- Metal Industry

Suitable Applications

- Assembly
- Handling sharp and oily parts
- Machining
- Glass handling
- Bodywork

CERTIFICATION

CAT II



EN 388:2016



4X43E

See overleaf for explanation

SKYTEC® | TRC715

PRODUCT INFORMATION

MATERIALS	LINER:	13 gauge HPPE, steel fibre, nylon
	COATING:	Foam nitrile
COLOUR	Green/black	
LENGTH (mm)	250 (Size Dependent)	
CUFF STYLE	Elasticated knit wrist	

ORDERING DETAILS

SIZE	CODE	PACKAGING
6/XS	SKG00016EB	10 pairs per bag
7/S	SKG00016ED	
8/M	SKG00016EF	120 pairs per case
9/L	SKG00016EH	
10/XL	SKG00016EJ	
11/XXL	SKG00016EL	


RECOMMENDATIONS FOR USE

- **USE:** General handling glove with cut protection. Not suitable for thermal, electrical, chemical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

CERTIFICATION LEGENDS



MECHANICAL HAZARDS EN 388:2016
PERFORMANCE LEVELS*

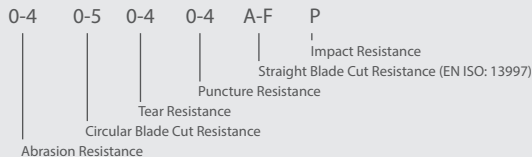

*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter

EUROPE

www.globusgroup.com

E: sales@globus.co.uk
T: +44 (0)161 877 4747
F: +44 (0)161 877 4746

MIDDLE EAST AND AFRICA

www.globusgroup.com/gcc

E: gcc@globusgroup.com
T: +971 4 882 9962
F: +971 4 882 9963

